

Standard Models


Model #	Blod length	Body width	Body height	cargo width	Compartment depth	Flip top depth	# of shelves	Welder deck opening
60CA54STND	9'	94"	40"	54"	20"	NA	8	NA
60CA54FT	9'	94"	38"	54"	20"	4-1/2"	8	NA
84CA54STND	11'	94"	40"	54"	20"	NA	12	NA
84CA54FT	11'	94"	38"	54"	20"	4-1/2"	12	NA
84CA54WDSTND	11'	94"	40"	54"	20"	NA	10	26"
84CA54SWDFT	11'	94"	38"	54"	20"	4-1/2"	10	26"



Various Options & Features

Custom Bodies

Aluminum Construction Available

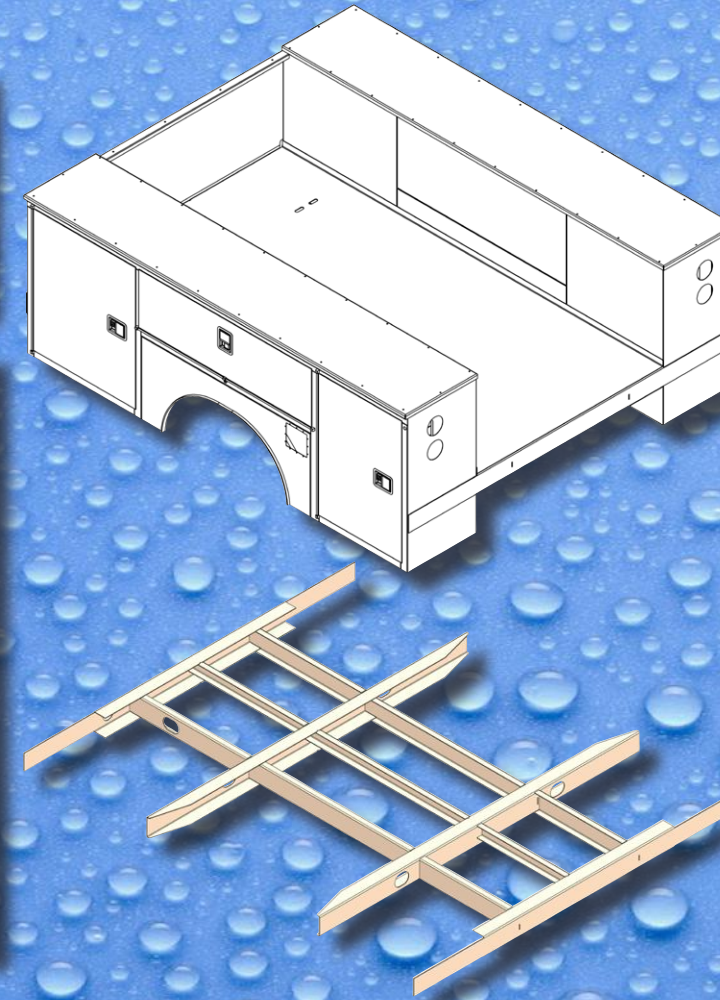

Body Materials

- 16 gauge galvaneal. - Main body material
- 1/8" Aluminum Tread-Brite tops
- 14 gauge galvaneal front bulkhead
- 18 gauge galvanized shelving installed on Uni-Strut for infinite adjustment
- 1/8" Aluminum Tread-Brite rock guards at the front of the body



Body Floor and Understructure

- 12 gauge hot rolled treadplate floor
- 5" formed channel full frame

Accessories:

- Stainless Steel automotive rotary type door latches with logo lasered
- Stud-mounted latches have hidden fasteners inside the door
- Adjustable striker brackets wrap around weatherstrip
- Automotive bulb type weatherstripping mechanically fastened to door frame with rounded corners
- Gas cylinder type door holders on vertically hinged doors and chain stops on horizontal compartments
- 1/4" steel flat rolled into wheel cut outs
- Fuel filler cut out in wheel panel on the streetside

